

The shape of the radio wavefront of extensive air showers as measured with LOFAR

A. Corstanje^a, P. Schellart^a, A. Nelles^{a,c}, S. Buitink^a, J. E. Enriquez^a, H. Falcke^{a,b,c,d}, W. Frieswijk^b, J. R. Hörandel^{a,c}, O. Scholten^e, S. ter Veen^a, S. Thoudam^a, M. van den Akker^a, and the LOFAR Collaboration

^aDepartment of Astrophysics/IMAPP, Radboud University Nijmegen, P.O. Box 9010, 6500 GL Nijmegen, The Netherlands

^bNetherlands Institute for Radio Astronomy (ASTRON), Postbus 2, 7990 AA Dwingeloo, The Netherlands

^cNikhef, Science Park Amsterdam, 1098 XG Amsterdam, The Netherlands

^dMax-Planck-Institut für Radioastronomie, Auf dem Hügel 69, 53121 Bonn, Germany

^eUniversity of Groningen, P.O. Box 72, 9700 AB Groningen, The Netherlands

Abstract

Extensive air showers, induced by high energy cosmic rays impinging on the Earth's atmosphere, produce radio emission that is measured with the LOFAR digital radio telescope. As the emission comes from a finite distance of a few kilometers, the incident wavefront is non-planar. A spherical or conical shape of the wavefront has been proposed, but measurements for individual air showers have been inconclusive so far. For a selected high-quality sample of 161 measured extensive air showers, we have reconstructed the wavefront by measuring pulse arrival times to sub-nanosecond accuracy in 200 to 350 individual antennas. For each measured air shower, we have fitted a conical, spherical, and hyperboloid shape to the arrival times. The fit quality and a likelihood analysis show that a hyperboloid is the best parametrization. Using a non-planar wavefront shape gives an improved angular resolution, when reconstructing the shower arrival direction. Furthermore, a dependence of the wavefront shape on the shower geometry can be seen. This suggests that it will be possible to use a wavefront shape analysis to get an additional handle on the atmospheric depth of the shower maximum, which is sensitive to the type of primary particle.

Keywords: Cosmic rays, Extensive air showers, Radio emission, Wavefront shape

1. Introduction

A high-energy cosmic ray that enters the atmosphere of the Earth will interact with a nucleus of an atmospheric molecule. This interaction produces secondary particles, which in turn interact, thereby creating a cascade of particles: an *extensive air shower*. The origin of these cosmic rays and their chemical composition are not fully known.

Due to the high incident energy of the cosmic ray the bulk of the secondary particles propagate downward with a high gamma factor. As this air shower passes through the atmosphere and the Earth's magnetic field, it emits radiation, which can be measured by antennas on the ground in a broad range of radio frequencies (MHz - GHz) [1, 2, 3]. The measured radiation is a combination of effects of several processes [4], including the propagation of the radiation in the atmosphere with non-unity

index of refraction [5]. Dominant in the frequency range considered in this study is the interaction in the geomagnetic field, which induces a time-varying current, as already suggested by [6]. An overview of the current understanding of the detailed mechanisms can be found in [7].

The radio signal reaches the ground as a coherent broadband pulse, with a duration on the order of 10 ns. As the radio emission originates effectively from a few kilometers in altitude, the incident wavefront as measured on the ground is non-planar. From geometrical considerations, it can be understood that the amount of curvature and the precise general shape of the wavefront, depend on the height of the emission, suggesting a relation to the depth of shower maximum, X_{\max} . The depth of shower maximum is related to the primary particle composition.

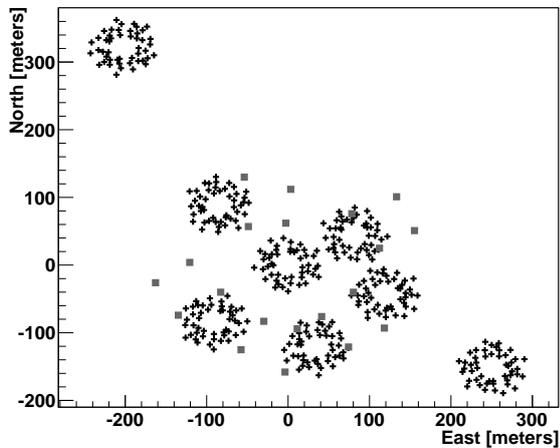


Figure 1: Layout of the innermost 8 stations of LOFAR. For each station the outer ring of low band radio antennas (black plus symbols), used for the analysis in this paper, are depicted. Located with the innermost six stations are the particle detectors (grey squares) used to trigger on extensive air showers.

Assuming a point source would result in a spherical wavefront shape, which [8] used in their analysis of LOPES data. It is argued in [9] that the actual shape of the wavefront is not spherical, but rather conical, as the emission is not point-like but stretched along the shower axis. This idea is supported by the air shower dataset collected at the LOPES experiment [10]. However, due to high ambient noise levels, the timing precision of these measurements did not allow for a distinction between spherical and conical shapes on a shower-by-shower basis, and only statistically was a conical wavefront shape favored over a spherical one.

We use the LOFAR digital radio telescope [11] to measure radio emission from air showers. LOFAR consists of an array of two types of antennas sensitive to frequencies in a bandwidth of 10 – 90 MHz and 110 – 240 MHz. While air showers have been measured in both frequency ranges [12, 13], this study only uses data gathered with the 10 – 90 MHz low-band antennas (Fig. 1 shows a schematic overview of the layout). Furthermore a combination of analog and digital filters limits the effective bandwidth to 30 – 80 MHz which has the least amount of radio frequency interference. LO-

FAR is equipped with ring buffers that can store the raw-voltage signals of each antenna for up to 5 seconds. These are used for cosmic-ray observations as described in [12].

Inside the inner core of LOFAR, which is a circular area of 320 m diameter, an array of 20 scintillator detectors (LORA) has been set up [14]. This independent air shower array is used to trigger a read-out of the radio ring buffers at the moment a high-energy air shower is detected. Analysis of the particle detections delivers basic air shower parameters such as the estimated position of the shower axis, energy, and arrival direction.

The high density of antennas of LOFAR, together with a high timing resolution (200 MHz sampling rate) are especially favorable for measuring the wavefront shape.

2. Simplified model for the wavefront shape

Inspection of the data shows that while the shape at larger distances from the shower axis might be described by a conical solution, in many measured air showers there is significant curvature near the shower axis. A natural function of two parameters that describes this behavior is a hyperbola. In Fig. 2 a toy model is sketched. The wavefront is formed by assuming the emission to be generated by a point source. At any given time, during the emission generation the source generates a spherical wavefront that propagates outward at the local speed of light c/n , where n is the local index of refraction. The point source is moving at a velocity $v > c/n$, and emits radiation for a limited amount of time Δt . In real extensive air showers this corresponds to the duration in which the bulk of the emission is generated. The emission is measured by an observer at a distance Δx from the point of the last generated emission. When this distance is small, $\Delta x/c\Delta t < 1$, (top panel) the combined wavefront shape is approximately conical. Even so, unless the distance to the last emission point is zero, a small curvature is visible near the shower axis, the radius of curvature corresponding to the distance. When viewed at intermediate distances, $\Delta x/c\Delta t \approx 1$, (middle panel), the opening angle of the conical part increases and the curved part near the shower axis extends a bit further outward. This shape is closely approximated by a hyperbola. When the distance to the last emission point is large compared to the duration of the emission times the speed of light, $\Delta x/c\Delta t \gg 1$, the wavefront shape is

approximately spherical. In this simplified picture, with constant but non-unity index of refraction, the wavefront shape is thus hyperbolic up to large distances from the shower axis.

Motivated by this toy model we therefore compare three parametrizations of the wavefront shape: a sphere, a cone and a hyperboloid, and we evaluate the quality of the fits to the LOFAR measurements.

3. Measurements

For this analysis we have used air-shower measurements with LOFAR accumulated between June 2011 and November 2013. In order to have a dense, high-quality sampling of the radio wavefront, and a substantial distance range of more than ~ 150 m, we require an air shower to be detected in at least four LOFAR core stations (each with two rings of 48 dual-polarized antennas). Furthermore, the highest quality data is obtained with the outer ring of low-band antennas and therefore the sample is restricted to this subset. This leaves a total of 165 measured air showers. Of these 165, three fail calibration of time differences between stations¹ (see Sect. 3.2) and one is unreliable due to thunderstorm conditions (see Sect. 4.6). This leaves a total of 161 high quality air shower measurements for this analysis.

All measured air showers are processed by the standard cosmic-ray reconstruction software as described in [12].

3.1. Pulse arrival times & uncertainties

The arrival time of the radio pulse in each dipole is determined using the raw-voltage traces. We define the arrival time as the time of the pulse maximum in the amplitude (or Hilbert) envelope of the analytic signal $A(t)$.

$$A(t) = \sqrt{x^2(t) + \hat{x}^2(t)}, \quad (1)$$

where $\hat{x}(t)$ is the Hilbert transform of the voltage-trace signal² $x(t)$. The Hilbert transform is defined by


$$\mathcal{F}[\hat{x}(t)](\omega) = -i \operatorname{sgn}(\omega) \mathcal{F}[x(t)](\omega), \quad (2)$$

where \mathcal{F} is the Fourier transform.


Uncertainties in the arrival time are assigned independently to each datapoint using the measured

¹Due to corrupted data.


²Upsampled by a factor of 32.

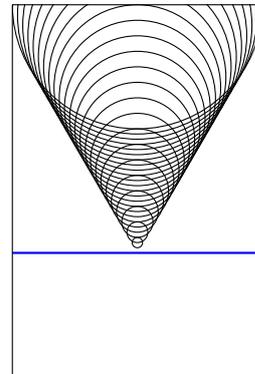

(a) Small



(b) Intermediate



(c) Large

Figure 2: Toy model motivating a hyperbolic wavefront shape. A point source moves at a velocity $v > c/n$ and emits for a limited amount of time. This generates a wavefront that is observed as conical (top panel) by an observer at small distances to the point where the source stops emitting. Observers at intermediate distances see a hyperbolic wavefront shape (middle panel). For observers at larger distances the observed wavefront shape is closer to a sphere (bottom panel).

signal-to-noise ratio (S/N) in amplitude and the following relation.

$$\sigma_{t_{\max}} = \frac{12.65}{S/N} \text{ ns} \quad (3)$$

A similar relation was found in [15]. The relation used here is derived from the data for each antenna, using a procedure as follows.

Uncertainties on the timing arise from distortions of the pulse shape due to fluctuations in the background noise. These uncertainties on the timing can be determined from the amplitude data for each antenna. To quantify them, we first select a noise block outside of the pulse region for each antenna and calculate the root-mean-square noise level. We also calculate the signal-to-noise ratio S/N of the pulse (in amplitude). Subsequently we add this noise to the data containing the pulse, and the pulse arrival time is calculated using the procedure described above. This procedure is repeated 10 times, where at each time the noise block is shifted by 100 ns. This gives 10 measurements of the pulse arrival time. The standard deviation of this set for each antenna is a measure of the uncertainty on the determination of the pulse arrival time. However, because this procedure effectively reduces S/N by a factor of $\sqrt{2}$, pulses with a low S/N are no longer correctly identified.

Therefore, instead of assigning this uncertainty to the datapoint directly, we estimate the uncertainties as a function of S/N by processing data for all antennas in the full air shower dataset. Uncertainty data is binned with respect to S/N . The bin size is set to 1.0 below $S/N = 50$ and to 10.0 above to ensure a sufficient number of points per bin. To prevent outliers (due to accidental spike selection in some antennas) from heavily influencing the results, the median value is calculated for any given S/N bin. The result can be seen in Fig. 3.

One can see that the timing uncertainty is inversely proportional to the signal-to-noise ratio, and that the measurements closely follow the fitted function. Fitting the function gives the proportionality factor in Eq. 3, and we use this to assign an uncertainty to the arrival time of the pulse maximum for each antenna depending on its measured S/N .

3.2. Time differences between stations

For time calibration of individual antennas within one LOFAR station, we use standard LO-

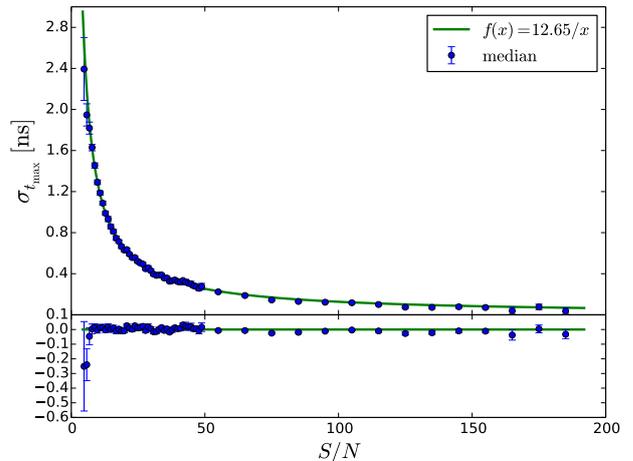


Figure 3: Uncertainties on the determination of the pulse arrival time as a function of signal to noise of the pulse amplitude. For each distance bin (of width 1.0 for $S/N < 50$ and width 10.0 for $S/N \geq 50$) the circular dots (blue) give the median value of the uncertainties. Error bars represent 1σ deviations from the median in each bin. The solid line (green) represents the fitted relation.

FAR calibration tables as described in [12]. On October 10th 2012 a common clock was installed for all stations in the LOFAR core region. Before that date each station outside the innermost region (consisting of 6 stations) had its own clock, synchronized by GPS³. Drifts of these clocks with respect to each other were of the order of 10 ns which is large when compared to the other timing uncertainties. Data taken before this date therefore requires a more involved calibration procedure described below.

Every air shower dataset is 2 ms long, and all measured air showers are scattered over a 2-year timespan. Therefore, using dedicated calibration observations is not practically possible. Instead, we make use of radio transmitter signals present in every dataset. The transmitters emit continuous waves, measured at each antenna with a different phase. We measure the phase per antenna and frequency bin, using the Fast Fourier Transform. Knowing the position of the transmitter, we can predict the relative phases at every antenna pair. The difference in measured versus expected (relative) phase, averaged over each LOFAR station,

³Global Positioning System

yields the inter-station clock calibration. It was found that higher-frequency signals can be measured with better phase stability; the public radio transmitters at 88 to 94 MHz are suitable for this purpose.

We use the (strongest) 88.0 MHz transmitter to fix the station's clock offsets modulo its period, 11.364 ns. The remaining ambiguity is resolved using trial and error in the wavefront analysis, incrementally adding outer-core stations to the (already calibrated) inner core data. As 11 ns is large compared to the wavefront timings, there is only one best-fitting solution.

Differences in filter characteristics or propagation effects between antennas in a station average out, leading to a calibration accuracy of the station clock offsets of about 0.3 ns accuracy.

3.3. Shower parameters

All measured air showers have also been recorded with the particle detectors. An independent reconstruction of the shower is done based on the detected particle density in each detector, as described in [14], which yields the direction and location of the shower axis, as well as an energy estimate. However, the reliability of these values is only given in a restricted parameter space; for example the shower axis should be inside the instrumented area. In order to retain a substantial set of showers for this analysis, these cuts are not applied to the set of radio measurements. Therefore, we do not have reliably reconstructed shower axis locations for all measured air showers. The reconstructed direction is however independent of the position of the shower axis and the quality of other reconstructed quantities.

4. Reconstructing the wavefront shape

From the arrival time of the pulse in different radio antennas, and the information from the particle detector array, we find the shape of the wavefront using the following procedure.

4.1. Plane-wave approximation and curvature

We infer the general direction of the incoming pulse by obtaining the best-fitting plane wave solution to the arrival times of the radio pulse:

$$ct_i = Ax_i + By_i + C, \quad (4)$$

where t_i and (x_i, y_i) are the arrival times and antenna positions respectively. The fitted parameters A and B yield the azimuth angle ϕ and elevation angle θ , from the relations

$$\theta = \arccos\left(\frac{1}{\sqrt{A^2 + B^2}}\right), \quad (5)$$

$$\phi = \frac{\pi}{2} - \arctan(B/A), \quad (6)$$

where the angle from the arctangent is taken in the appropriate quadrant. The global offset C is not used here. We can subtract the arrival times of the best-fitting plane wave from the measured times. This gives the curvature of the wavefront with respect to the array barycenter⁴.

4.2. Shower plane geometry

Given the shower axis position and direction, we can make a one-dimensional plot of the wavefront as a function of the distance to the shower axis. This assumes axial symmetry of the wavefront. In order to do this, all antenna positions are projected into the shower plane (defined by the shower axis as its normal vector), see Fig. 4.

A one-dimensional function describing the wavefront curvature can now be fitted to the arrival times as a function of distance to the shower axis.

4.3. Fitting the wavefront shape

Various wavefront shapes have been proposed; we test a conical and spherical shape, such as argued for in [9]. We also test a hyperboloid; this is a natural function with 2 parameters that combines a curved shape for small distances, and a conical shape for large distances.

The fit functions, for the arrival time differences with respect to a plane wave as a function of distance to the shower axis, are those for a line (cone), circle (sphere) and hyperbola (hyperboloid) respectively.

$$ct_{\text{con}}(r) = sr, \quad (7)$$

$$ct_{\text{sph}}(r) = \sqrt{R^2 + r^2} - R, \quad (8)$$

$$ct_{\text{hyp}}(r) = -a + \sqrt{a^2 + b^2 r^2}, \quad (9)$$

where s is the cone slope, R the radius of the sphere, and a and b are the parameters of the hyperboloid. These three functions are fitted in a standard non-linear least squares approach. We keep for each fit

⁴The average of the coordinates for antennas with data.

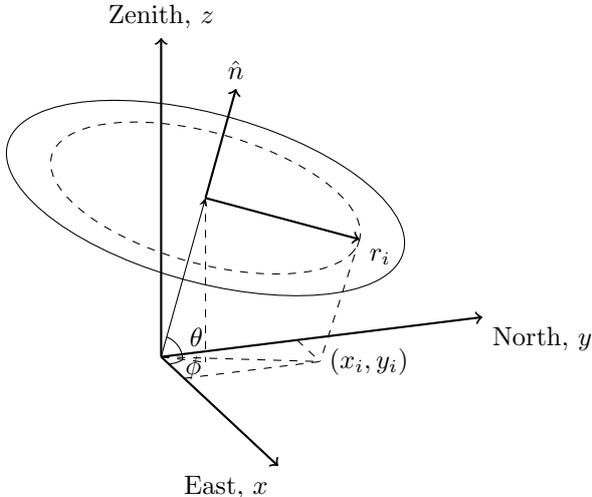


Figure 4: Geometry of the shower plane for a shower arriving with azimuth and elevation angles ϕ and θ respectively. The direction of the shower plane is defined by its normal vector \hat{n} . All antenna positions (x_i, y_i) are projected onto this plane giving r_i , the distance to the shower axis.

type the best fitting parameters as well as the fit quality, as measured by the unreduced χ^2 value

$$\chi_{\text{type}}^2 = \sum_{i=0}^{N_{\text{antennas}}} \frac{(t_{\text{type}}(r_i) - t_i)^2}{\sigma_i^2}. \quad (10)$$

4.4. Considerations for fit stability

As the arrival time differences from a plane wave solution, and thus the shape of the wavefront, are sensitive to the direction and location of the shower axis, we include these as free parameters in the fitting procedure.

However, to prevent the fit from becoming unstable or finding only local minima we choose a nested approach. For every trial of the shower axis location, we optimize the direction; for every trial of the direction, we calculate the best-fit curve parameters using a nonlinear least-squares solver. Furthermore, to prevent the shower axis location search from getting stuck in a local minimum it is first optimized on a 500 m by 500 m grid in steps of 100 m and only in later iterations optimized further using a Nelder-Mead simplex optimization, starting from the optimal grid position.

4.5. Including particle detector information

When optimizing the shower axis location, it might happen that the position is not well constrained due to the geometric distribution of the measurements. Furthermore, fitting a non-correct wavefront may also lead to an unphysical shower axis location. Typically this takes the form of the shower axis location moving too far away from the measured barycenter. The data from the particle detectors provide a further constraint on the shower axis location. The lateral distribution of the signal (number of particles as a function of distance to the shower axis) is well described by a Nishimura-Kamata-Greisen function (NKG) [16, 17] and will restrict the position of the shower axis. Therefore, in the fit procedure we also re-fit the particle detector data using an NKG-function and add the (unreduced) χ^2 of this fit to the total χ^2 to minimize. This has a small influence when the shower axis location is within reasonable distances (due to the much larger number of radio measurements) but starts to dominate when the shower axis location moves to a position not supported by particle data. Note that the stored χ_{type}^2 of the optimal curve fit does *not* include the particle fit χ^2 .

4.6. Thunderstorm observations

It has been reported that measured radio signals of air shower are amplified during thunderstorm conditions, which is attributed to the acceleration of electrons and positron in the electric fields [18]. In order to avoid bias in the wavefront analysis, we have excluded one air shower that was measured during thunderstorm conditions. As the current dataset was taken without a local electric-field meter, the definition of thunderstorm conditions is based on lightning detections as provided by the Royal Dutch Meteorological Institute [19]. This cut does not account for local electric fields that do not manifest in lightning strikes. A local electric field meter is currently being installed at LOFAR. Future analyses will investigate the effects of the local electric field on air shower radio emission in more detail.

5. Results

An example shower is shown in Fig. 5. This plot shows the layout of the LOFAR low-band antennas in the inner-core region. The colors show deviations from the best-fitting plane-wave solution, increasing outward from the center of the array.

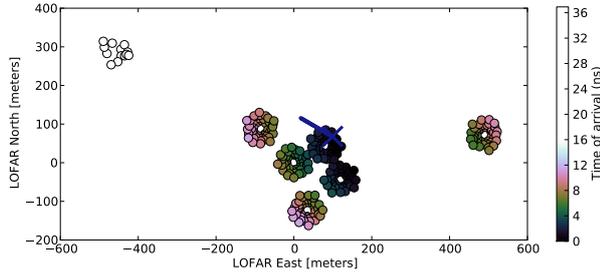


Figure 5: Relative arrival times for an example air shower measured with the LOFAR low band antennas. Circles indicate LBA antenna positions and their color corresponds to the measured pulse delay with respect to the best fitting plane wave solution. The shower axis is indicated by the blue line corresponding to the azimuthal arrival direction and cross where it intersects the ground.

5.1. Wavefront shape


The resulting best fitting wavefront shapes are given in Fig. 6a, 6b and 6c for a hyperbolic, conical and spherical wavefront, respectively. The wavefront shape of this air shower is best fitted by a hyperbola due to significant curvature near the shower axis. Fig. 7 shows the χ^2/ndf values obtained. For those showers that do not show curvature, we see that either the timing errors are too large to see it (e.g. for weak showers), or the shower axis location is too far away from the closest antennas, or the geometry of the shower intrinsically produces a non-curved wavefront shape.

In order to check which wavefront shape is favored by the overall dataset we perform a likelihood ratio test. The test statistic for the conical case is:


$$D = -2 \frac{\ln(\text{likelihood hyperbolic})}{\ln(\text{likelihood conical})} \quad (11)$$

$$= \sum_k^N \chi_{\text{con}}^2 - \chi_{\text{hyp}}^2 \quad (12)$$


where the sum k is over all N showers. For an appropriate choice of parameters the hyperbolic function can turn into either a conical or a spherical function. Thus, the solution space of the spherical and conical fit functions are subsets of the solution space of the hyperbolic fit. Therefore (if the fit converged correctly) the hyperbolic fit will always have a lower χ^2/ndf value, even when the wavefront shape is intrinsically spherical or conical.

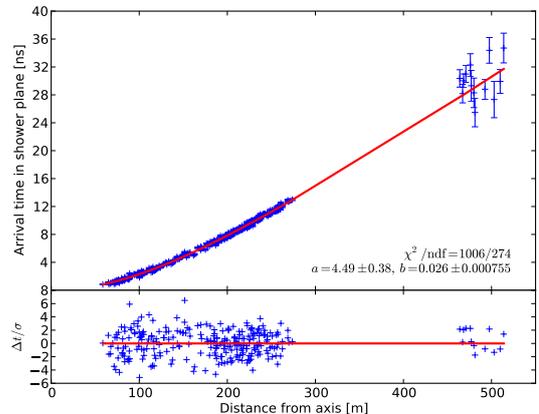

(a) Hyperbolic fit

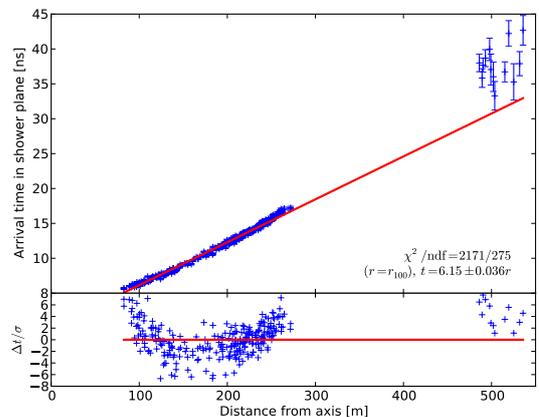

(b) Conical fit

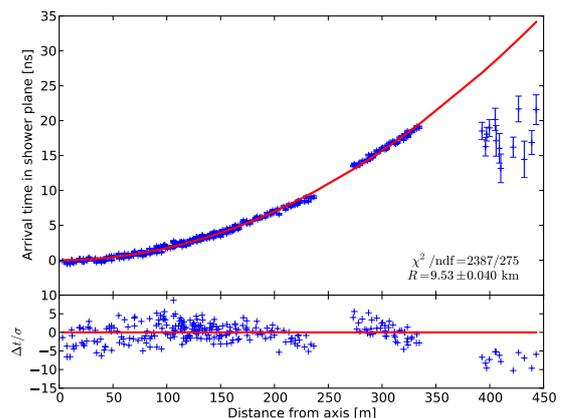

(c) Spherical fit

Figure 6: The arrival time differences from a plane wave as a function of distance to the shower axis with the best fitting shape solutions. A hyperbolic (top), conical (middle) and spherical (bottom) fit has been applied, respectively. Each plot shows the arrival times as a function of the distance to the shower axis (top panel) and deviations from the best fit scaled to the uncertainty for each datapoint (bottom panel).

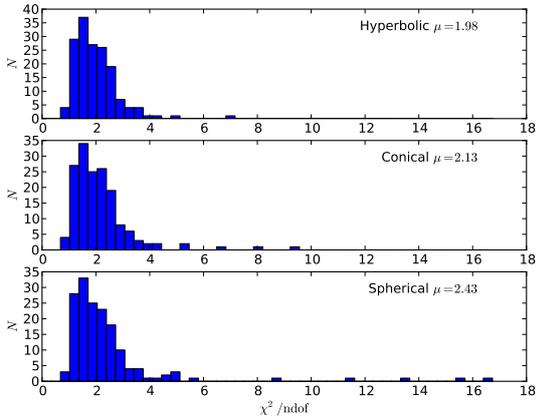


Figure 7: Fit quality for a hyperbolic (top), conical (middle) and spherical (bottom) wavefront shape.

Under the null hypothesis that the wavefront shape is intrinsically conical (or spherical) the test statistic D should follow a $\chi^2(N)$ distribution. From the data we obtain the value $D = 6309$. The probability for this value to occur if the shape is conical is very small, $p \ll 10^{-4}$. There are two possible reasons for obtaining a higher value. Either the timing uncertainties are underestimated or the wavefront shape is generally not conical. Given the obtained reduced χ^2 values of the hyperbolic fit, averaging to 1.98, it is unlikely that the uncertainties are underestimated by more than a factor ~ 1.5 . This is not enough by far to explain the measured value of the test statistic. Therefore we reject the null hypothesis that the wavefront shape is conical. Using the same procedure we also reject a spherical wavefront shape⁵. Moreover, the lack of overall structure in the residuals of the hyperbolic fits (at our timing accuracy) argues against a more complicated wavefront shape. Therefore we conclude that the wavefront shape is hyperbolic.

The wavefront shape might not be axisymmetric. However, if this is indeed the case, it is not resolvable with the current timing resolution.

5.2. Direction reconstruction

Comparing the reconstruction of the shower axis direction for the best fitting hyperbolic wavefront to the planar wavefront solution, in the top panel

of Fig. 8, we see that the latter typically deviates by 1° . Therefore, using a non-planar wavefront shape will lead to an improvement in reconstruction accuracy of the air shower direction.

As can be seen from the bottom panel in Fig. 8 however, the exact shape of the non-planar wavefront is less important. The difference between the reconstructed direction using a conical or hyperbolic wavefront shape is typically less than 0.1° . Since a conical fit contains one less free parameter this may be more practical in reconstruction software. However, a planar fit does not depend on the position of the shower axis or the exact shape of the wavefront and is thereby more robust and even more suitable for standard reconstruction software when higher accuracy is not required.

5.3. Correlations with air-shower parameters

From [9] it is expected that the shape of the radio wavefront depends on air-shower parameters and the distance to the shower maximum in particular. Since, for a shower with the same X_{\max} the distance to shower maximum increases with decreasing elevation angle (θ), the shape of the radio wavefront is also expected to depend on the elevation angle. This can be seen in Fig. 2 where the radius of curvature of the inner part, its extent and the slope of the conical part are all expected to depend on the distance to the last emission point. This in turn would depend on X_{\max} .

Similar to [9], we can take e.g. the time lag of the radio wavefront at $r = 100$ m, with respect to the arrival time of the emission along the shower axis ($r = 0$). It is not possible to use the hyperbola parameter b (the slope of the asymptote) directly, as in some cases the asymptotic regime is (far) outside the data range. Fig. 9 shows the time lag at $r = 100$ m as a function of elevation angle. We find a weak correlation with a Pearson correlation coefficient of 0.32. The probability of obtaining this value for uncorrelated data is $4 \cdot 10^{-5}$.

To give an order of magnitude of the angular deviation between the measured wavefront and the shower plane, we can use t_{100} to get

$$\alpha = \frac{ct_{100}}{100 \text{ m}}, \quad (13)$$

which is on average $0.11 \text{ rad} = 0.63^\circ$. As the hyperbola becomes steeper further out, we could also use t_{250} instead (still inside the data range), which would give on average 0.94° . These numbers agree

⁵With $D = 16927$.

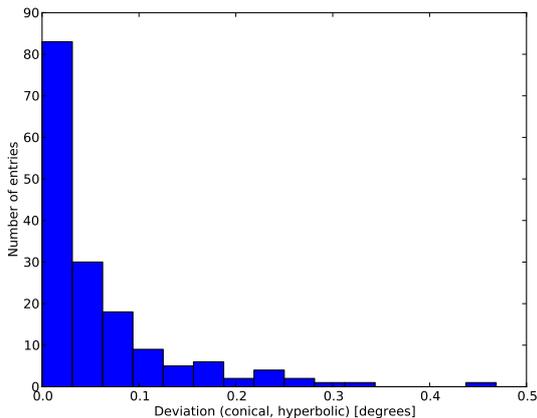
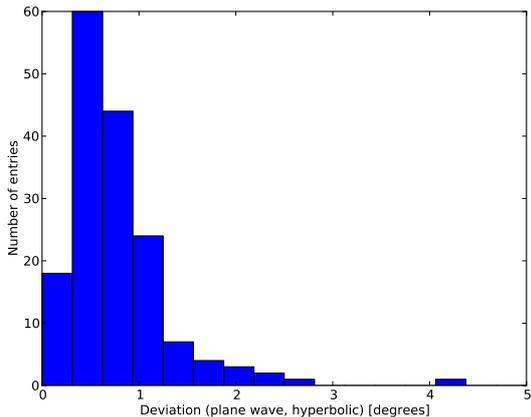


Figure 8: Angular difference between reconstructed shower axis direction for various wavefront shape assumptions. Assuming a planar wavefront shape typically introduces an error in the direction of 0.5° , when the shape is in fact hyperbolic (top plot). The differences in reconstructed direction between a conical and hyperbolic wavefront shape are approximately a factor of ten smaller (bottom plot).

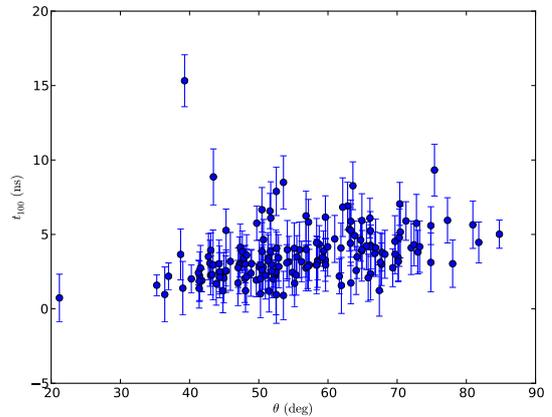


Figure 9: Time lag of the radio wavefront at $r = 100$ m, with respect to the arrival time of the emission along the shower axis ($r = 0$), as a function of elevation angle. Arrival times are obtained by evaluating the best fitting hyperbolic fit at $r = 100$ m.

qualitatively with the average deviation angle from a plane of 0.83° found by [9]. The small angle of less than one degree explains why accurate timing is required in order to measure the wavefront shapes.

In practice however, it appears to be difficult to use wavefront timing by itself to determine (the distance to) X_{\max} . This is due to the strong interdependency of the shower axis position and the exact shape of the wavefront. While the wavefront shape remains hyperbolic when moving the shower axis location around, the curvature near the axis as well as the slope further out change. Therefore it is best to combine timing information with other information available on the shower. This information may come from the particle detectors, or from the radio data in the form of the intensity pattern at ground level. It has already been shown that the radio intensity pattern itself is also highly sensitive to X_{\max} [20]. Combining this technique with timing information will improve the accuracy of these measurements.

6. Conclusions

We have shown that the wavefront of the radio emission in extensive air showers is measured to a high precision (better than 1 ns for each antenna)

with the LOFAR radio telescope. The shape of the wavefront is best parametrized as a hyperboloid, curved near the shower axis and approximately conical further out. A hyperbolic shape fits significantly better than the previously proposed spherical and conical shapes.

Reconstruction of the shower geometry using a hyperbolic wavefront yields an improved angular resolution and an independent measurement of the core position. The angular resolution improves from 0.5 degrees (planar wavefront) to 0.1 degrees (hyperbolic). This improved angular resolution will be of particular importance for radio X_{\max} measurements for highly inclined showers where small deviations in arrival angle correspond to large differences in the slanted atmospheric depth.

The high antenna density and high timing resolution of LOFAR offer a unique opportunity for a detailed comparison with full Monte Carlo air shower simulations, including the arrival time measurements presented here. Furthermore, efforts to integrate timing information within the X_{\max} measurement technique from [20] are currently ongoing.

7. Acknowledgements

The LOFAR Key Science Project Cosmic Rays very much acknowledges the scientific and technical support from ASTRON.

Furthermore, we acknowledge financial support from the Netherlands Research School for Astronomy (NOVA), the Samenwerkingsverband Noord-Nederland (SNN) and the Foundation for Fundamental Research on Matter (FOM) as well as support from the Netherlands Organization for Scientific Research (NWO), VENI grant 639-041-130. We acknowledge funding from an Advanced Grant of the European Research Council under the European Union's Seventh Framework Program (FP/2007-2013) / ERC Grant Agreement n. 227610.

LOFAR, the Low Frequency Array designed and constructed by ASTRON, has facilities in several countries, that are owned by various parties (each with their own funding sources), and that are collectively operated by the International LOFAR Telescope (ILT) foundation under a joint scientific policy.

References

- [1] H. Allan, J. Jones, Radio Pulses from Extensive Air Showers, *Nature* 212 (1966) 129–131.
- [2] J. Jelley, J. Fruin, N. Porter, T. C. Weekes, F. G. Smith, R. Proter, Radio pulses from extensive Cosmic-Ray Air Showers, *Nature* 205 (1965) 327.
- [3] H. Falcke, et al. LOPES collaboration, Detection and imaging of atmospheric radio flashes from cosmic ray air showers, *Nature* 435 (2005) 313–316.
- [4] T. Huege, M. Ludwig, C. W. James, Simulating radio emission from air showers with CoREAS, ARENA 2012, AIP Conf. Proc. 1535 (2013) 128–132doi:http://dx.doi.org/10.1063/1.4807534.
- [5] K. Werner, K. D. de Vries, O. Scholten, A realistic treatment of geomagnetic Cherenkov radiation from cosmic ray air showers, *Astroparticle Physics* 37 (2012) 5–16. arXiv:1201.4471, doi:10.1016/j.astropartphys.2012.07.007.
- [6] F. D. Kahn, I. Lerche, Radiation from cosmic ray air showers, *Proc. R. Soc. Lond. A* 289 (1966) 206–213.
- [7] T. Huege, Theory and simulations of air shower radio emission, AIP Conf. Proc. 5th Int. ARENA Workshop 2012 1535 (2012) 121–127.
- [8] A. Nigl, et al. LOPES collaboration, Direction identification in radio images of cosmic-ray air showers detected with LOPES and KASCADE, *Astronomy & Astrophysics* 487 (2008) 781–788. arXiv:0809.2742, doi:10.1051/0004-6361/20079218.
- [9] F. G. Schröder, et al. LOPES collaboration, Investigation of the Radio Wavefront of Air Showers with LOPES and REAS3, in: International Cosmic Ray Conference, Vol. 3 of International Cosmic Ray Conference, 2011, p. 64.
- [10] F. G. Schröder, et al. LOPES collaboration, Cosmic ray measurements with LOPES: Status and recent results, AIP Conf. Proc. 5th Int. ARENA Workshop 2012 1535 (2012) 78.
- [11] M. P. van Haarlem, et al. LOFAR collaboration., LOFAR: The Low Frequency Array, *Astronomy and Astrophysics* 556 (2013) A2.
- [12] P. Schellart, A. Nelles, et al. LOFAR collaboration, Detecting cosmic rays with the LOFAR radio telescope, *Astronomy & Astrophysics* 560 (2013) A98. arXiv:1311.1399, doi:10.1051/0004-6361/201322683.
- [13] A. Nelles, P. Schellart, et al. LOFAR collaboration, Measuring a Cherenkov ring in the radio emission from air showers at 110-230 MHz with LOFAR, submitted to *Astroparticle Physics*.
- [14] S. Thoudam, et al. LOFAR collaboration, The LOFAR Radboud Air Shower Array, submitted to *Nuclear Instrument and Methods A*.
- [15] F. G. Schröder, et al. LOPES collaboration, On noise treatment in radio measurements of cosmic ray air showers, *Nuclear Instruments and Methods in Physics Research A* 662 (2012) 238. arXiv:1009.3444, doi:10.1016/j.nima.2010.11.009.
- [16] K. Kamata, J. Nishimura, The Lateral and the Angular Structure Functions of Electron Showers, *Progress of Theoretical Physics Supplement* 6 (1958) 93–155. doi:10.1143/PTPS.6.93.
- [17] K. Greisen, Cosmic Ray Showers, *Annual Review of Nuclear and Particle Science* 10 (1960) 63–108. doi:10.1146/annurev.ns.10.120160.000431.
- [18] S. Buitink, et al. LOPES collaboration, Amplified ra-

dio emission from cosmic ray air showers in thunderstorms, *Astronomy & Astrophysics* 467 (2007) 385–394. arXiv:astro-ph/0702432, doi:10.1051/0004-6361:20066006.

- [19] H. Wessels, Evaluation of a radio interferometry lightning positioning system, Tech. rep., KNMI Scientific Report (1998).
- [20] S. Buitink, et al LOFAR collaboration, Shower Xmax determination based on LOFAR radio measurements, in: *Proceedings of the 33rd International Cosmic Ray Conference*, Rio De Janeiro, 2013.